# MF-40V360D -40°C Biomedical Freezer





## **FEATURERS**



## **Imported brand compressors**

Double cooling system, double chamber



## Fast pull down

Rapid cooling from +25°C to -40°C



## **Coil evaporator**

Better performance, easy maintenance



#### **USB** interface

10-year data for downloading



## **Lockable doors**

Standard locks & padlocks



## **Large LED displays**

Easy to observe and operate, built-in USB



## Precise temp. control

Temp. control accurate to 0.1°C



## 6 types of alarm

Audible and visual alarms




#### Variable space

Adjustable shelves and drawers





## **Eco-friendly**

CFC-free refrigerant and energy-saving

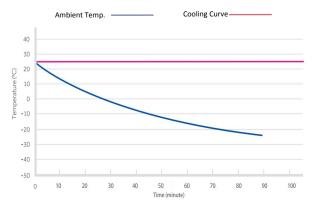


MF-40V360D Pull down at ambient temp. 25°C



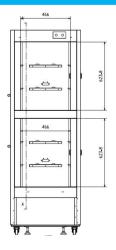

## **STRUCTURE**

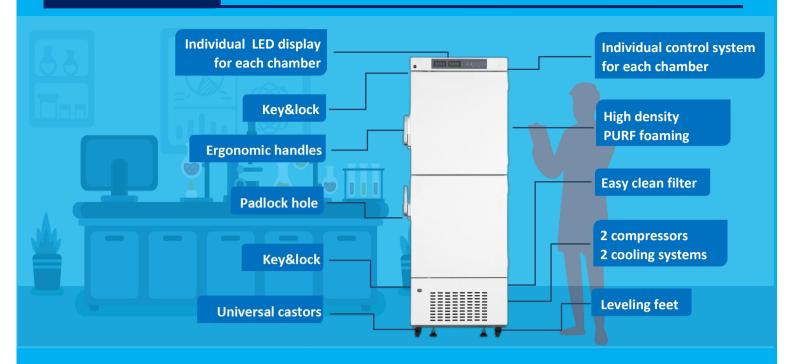



## **PARAMETER**

Performance		Refrigeration System		Alarms	
Cooling method	Direct cooling	Compressor brand/QTY	CUBIGEL/2	High/low temperature	Υ
Defrost	Manual	Condenser	Copper tube	Power failure	Υ
Refrigerant	R290	Temp. controller	Microprocessor	Sensor error	Y
Temperature range	-20°C~-40°C	Sensor	NTC	Controller failure	Υ
Ambient temperature	10~32°C	Display	Digital display	Door ajar	Υ

Electrical Data		Dimensions		Other	
Voltage frequency( V/Hz)	220/50Hz	Capacity (L/cu.ft)	358/12.6	Remote alarm port	Υ
Power (W)	310W	Packing size(W*D*H)(mm)	780*920*1990	Remote alarm port	Y
Current (A)	3.0 A	NT/GT (KG)	138/178	Access port QTY/Dia.	2/25MM